

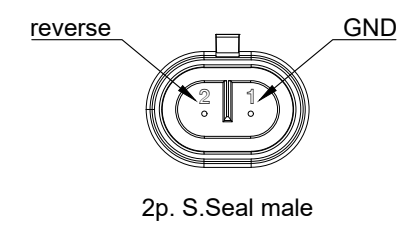
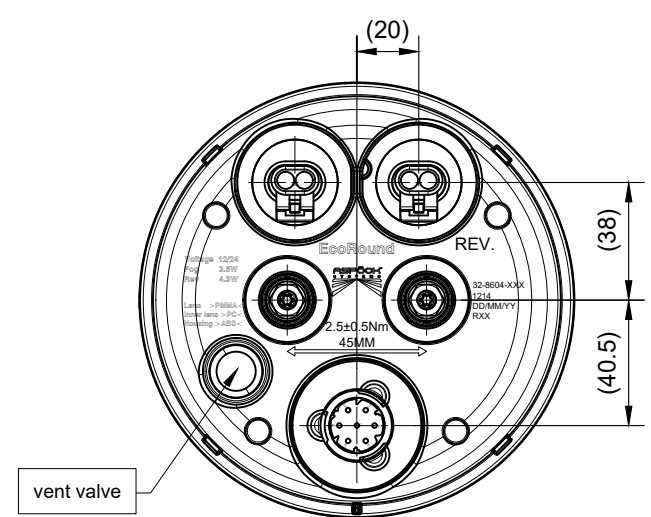
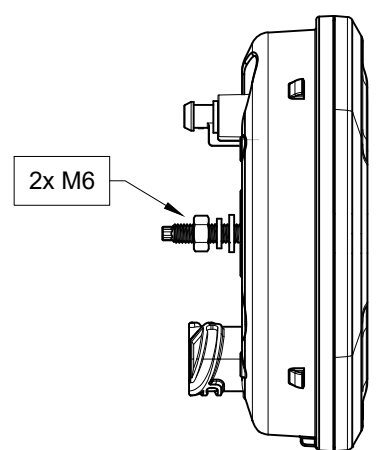
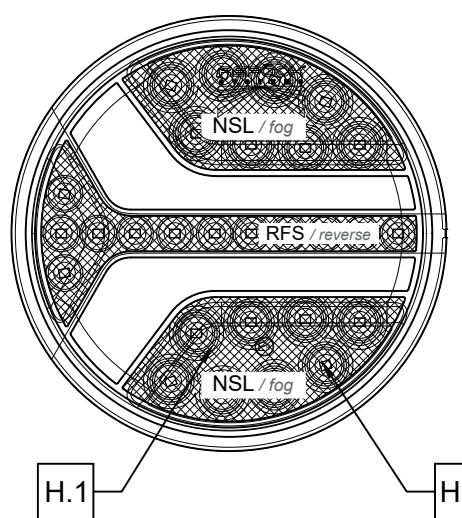


Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

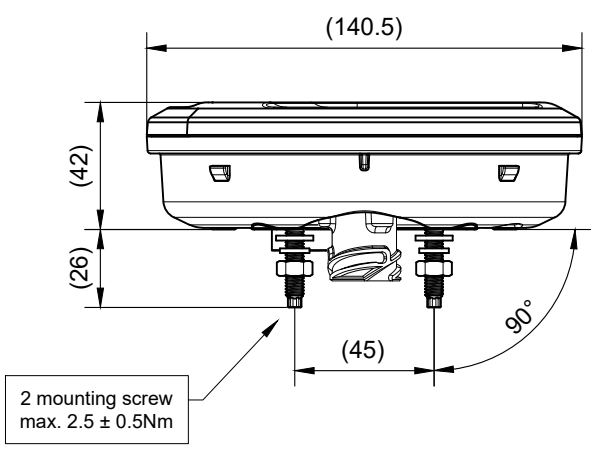

7p. AMP	
FUNCTION	PIN
Masse GND	1
-	-
Rückfahr. Reverse	3
-	-
-	-
Nebelschl. Fog	6
-	-



Electrical Specification				
Funktion Function	Nennspannung Nominal Voltage	Spannungsbereich Voltage Range	Nennstrom Nominal Current	Nennleistung Nominal Power
Volt (V)	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Fog	12V / 24V	9V - 33V	0.29 / 0.15A	3.5W
Reverse	12V / 24V	9V - 33V	0.36 / 0.18A	4.3W

Homologation description					
H.1	E9 16042	148R 00	F1	AR	
H.2	E9 23891	10R 06			

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10 Theoretical dimension ISO 1101
 Test dimension (SPC) [] Unfinished dimension DIN 406-10 Surface quality ISO 1302

Designed by: Hager Cornelia 2024/02/12 Checked by: Wetzlmaier Gerlinde 2024/02/12 Approved by: Hinterberger Michael 2024/02/14

ASPÖCK SYSTEMS Designation: EcoRound RF 7pAMP+2pSS Rev Project number: -

Drawing Nr. 32860401 Tolerance: CP_04-2_Toleranzen Verkabelungsprodukte Weight: - Scale: not in scale

Business Unit SALES - 24 Level: R01 Sheet: 1 / 1

Part Number: 32-8604-017 Dimensions in mm

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.