


Level	Zone	ECI N°.	Revision note	Date	Designed	Checked
R04	04	17833	Umstellung von Hotmelt auf Vergusstechnologie changeover from hotmelt to potting technology	2023/07/04	Wetzlm.G	Strubr.D

CONNECTOR:		①②	K1
function	pin	wire colour	wire colour
Blinker LH <i>DI LH</i>	1	gelb <i>yellow</i>	-
Blinker RH <i>DI RH</i>	2	grün <i>green</i>	-
Nebelschl. <i>Fog</i>	3	blau <i>blue</i>	-
Masse <i>GND</i>	4	weiss <i>white</i>	weiss <i>white</i>
Rücklicht LH <i>Tail LH</i>	5	schwarz <i>black</i>	braun <i>brown</i>
Rücklicht RH <i>Tail RH</i>	6	braun <i>brown</i>	-
Bremse <i>Stop</i>	7	rot <i>red</i>	-
Rückfahr. <i>Reverse</i>	8	grau <i>grey</i>	blau <i>blue</i>

CONNECTOR:		③④
function	pin	wire colour
Masse <i>GND</i>	1	weiss <i>white</i>
+VDC <i>+VDC</i>	2	braun <i>brown</i>

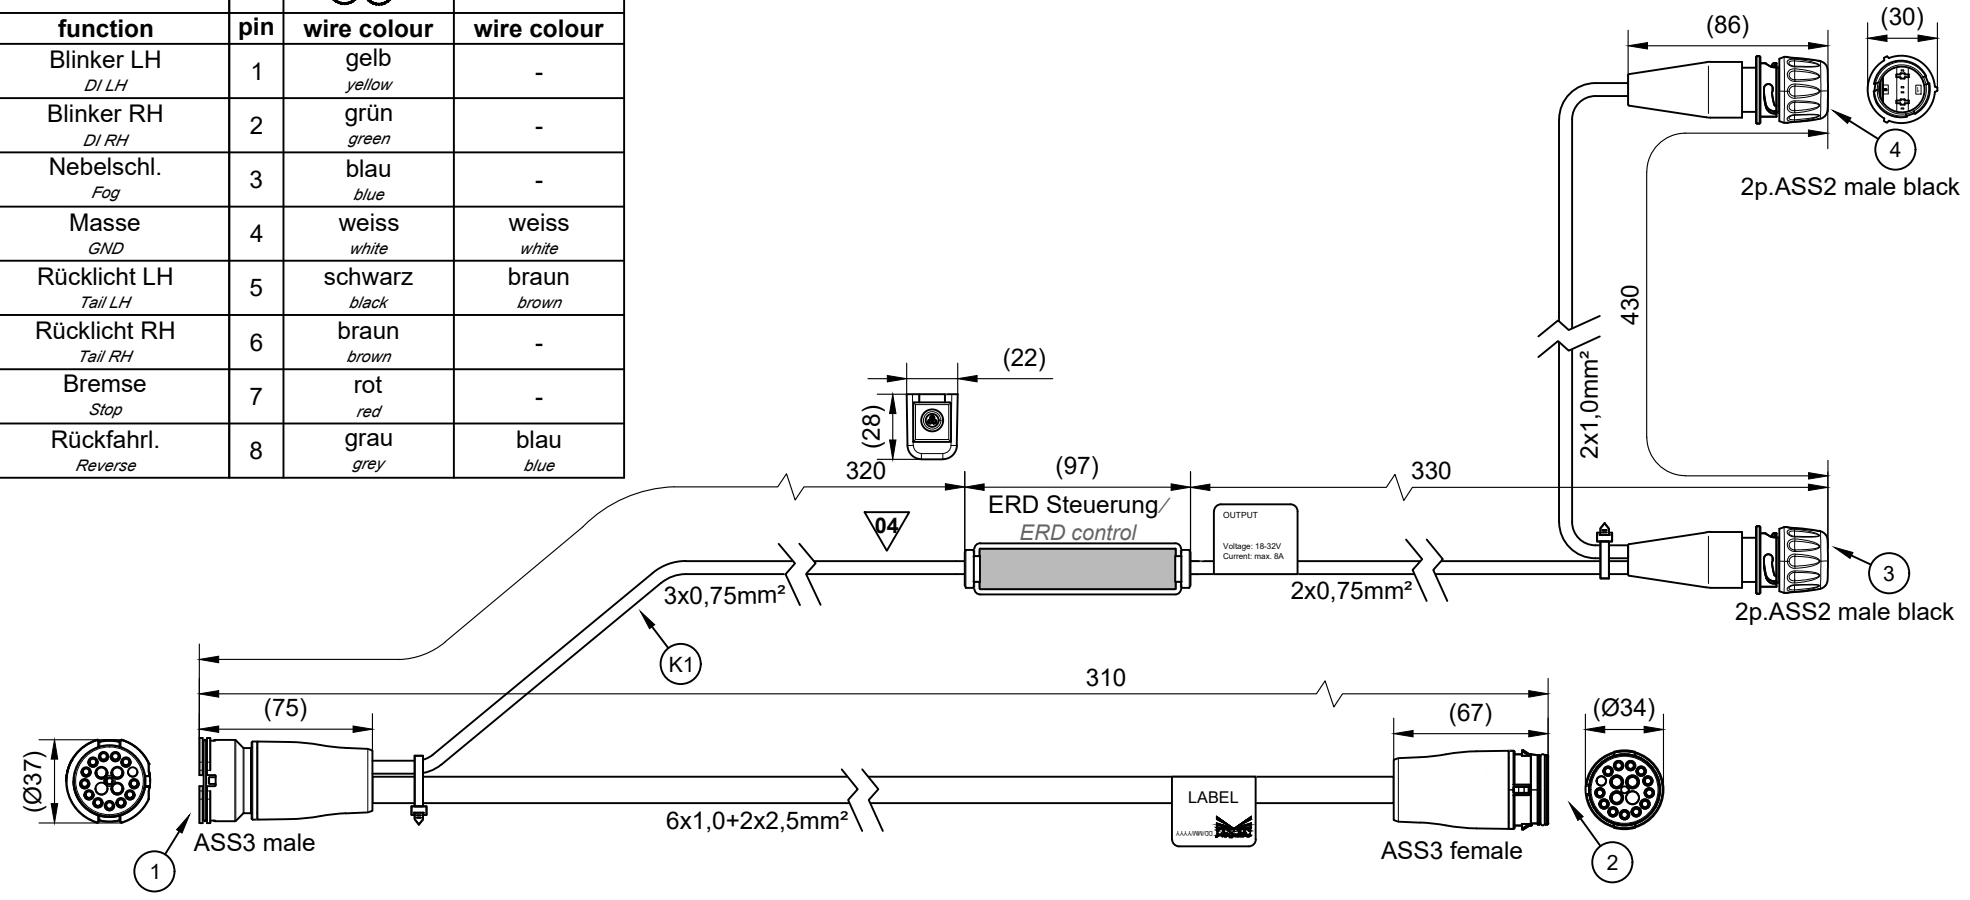

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
Volt (V)	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
ERD - Tail	24V	20V - 32V	0.04A	1W
OUT - Reverse	24	20V - 32V	max. 8A	190W

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10 Theoretical dimension ISO 1101
 Test dimension (SPC) [] Unfinished dimension DIN 406-10 Surface quality ISO 1302

Designed by: Wetzlmaier Gerlinde 2016/05/27 Checked by: Strubreiber Daniel 2016/05/27 Approved by: Pichler Helga 2017/10/11

ASPOCK SYSTEMS Designation: Electronic Reverse Device (ERD) 8adr. Project number: -

Drawing Nr. 75034100 Tolerance: CP_04-2_Toleranzen Verkabelungsprodukte Weight: - Scale: not in scale

Business Unit SALES - 24 Level: R04 Sheet: 1 / 1

Part Number: 75-0341-007 Dimensions in mm

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

