



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

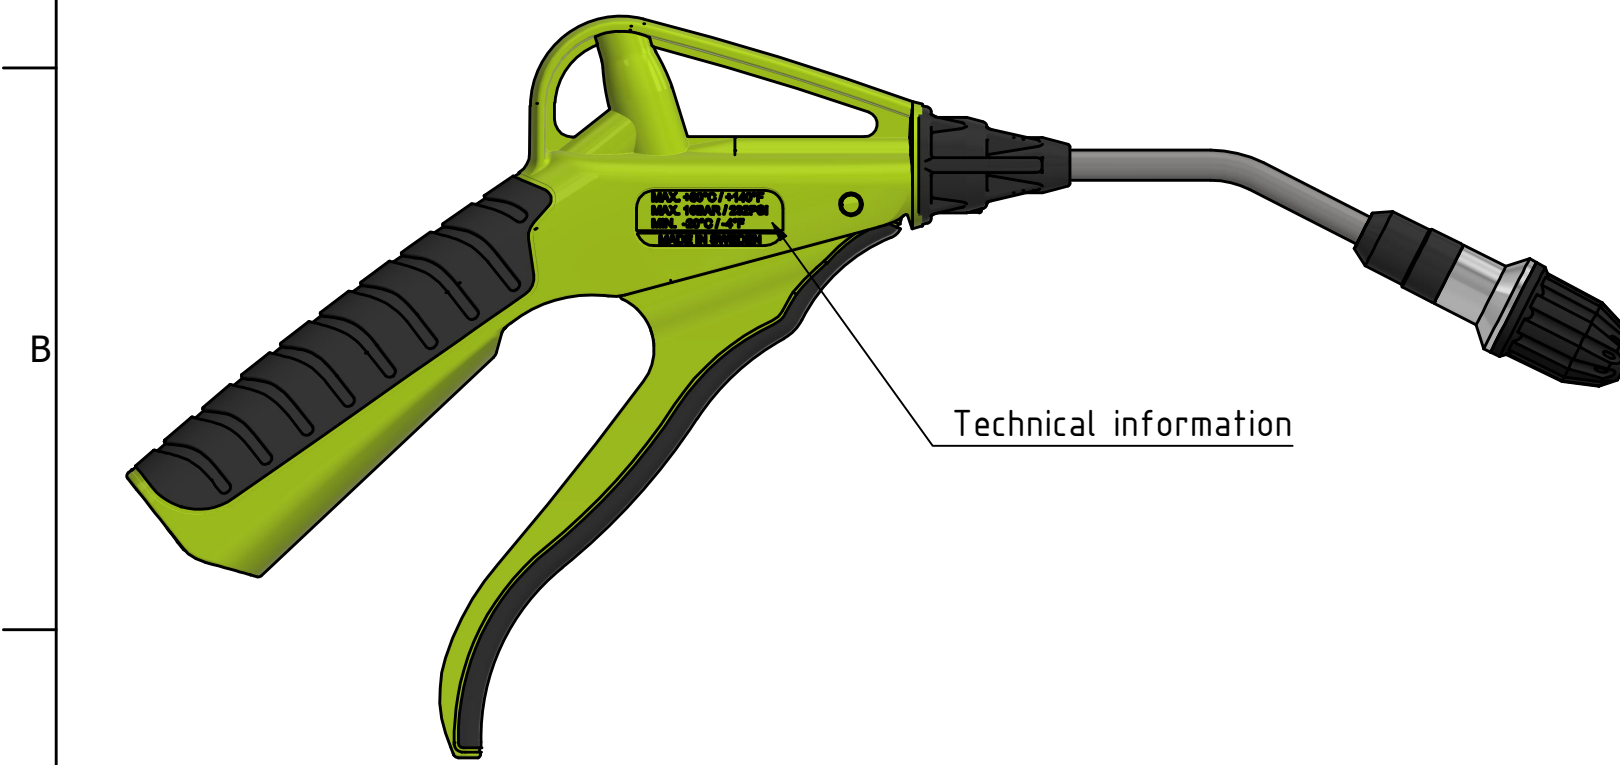

14	1	Label dome	Plastic
13	1	Handle	Plastic/TPE
12	1	Body	Plastic/TPE
11	1	Wire coil	Stainless steel
10	1	Sleeve	Plastic
9	1	Silencer Nozzle	Plastic
8	1	O-ring	NBR
7	1	Nozzle adaptor	Aluminium
6	1	Lip seal	NBR
5	1	O-ring	NBR
4	1	Spring	Stainless steel
3	1	Valve	Plastic
2	1	Cap	Plastic
1	1	Tube	Brass, plated
Item	Qty	Description	Material
		Scale: 2 : 3	Drawn: CABANLA
		Checked: JOTU	Appr.: JOOL
		ECO	
		Date	
		Drawing No. 112090952	
		Issue: A	Sheet: 1 / (1)

Product No.	112090952
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +60°C
Connection:	Rc 1/4" fem
Sealing material:	NBR
Air flow:	380 l/min (inlet pressure 6 bar)

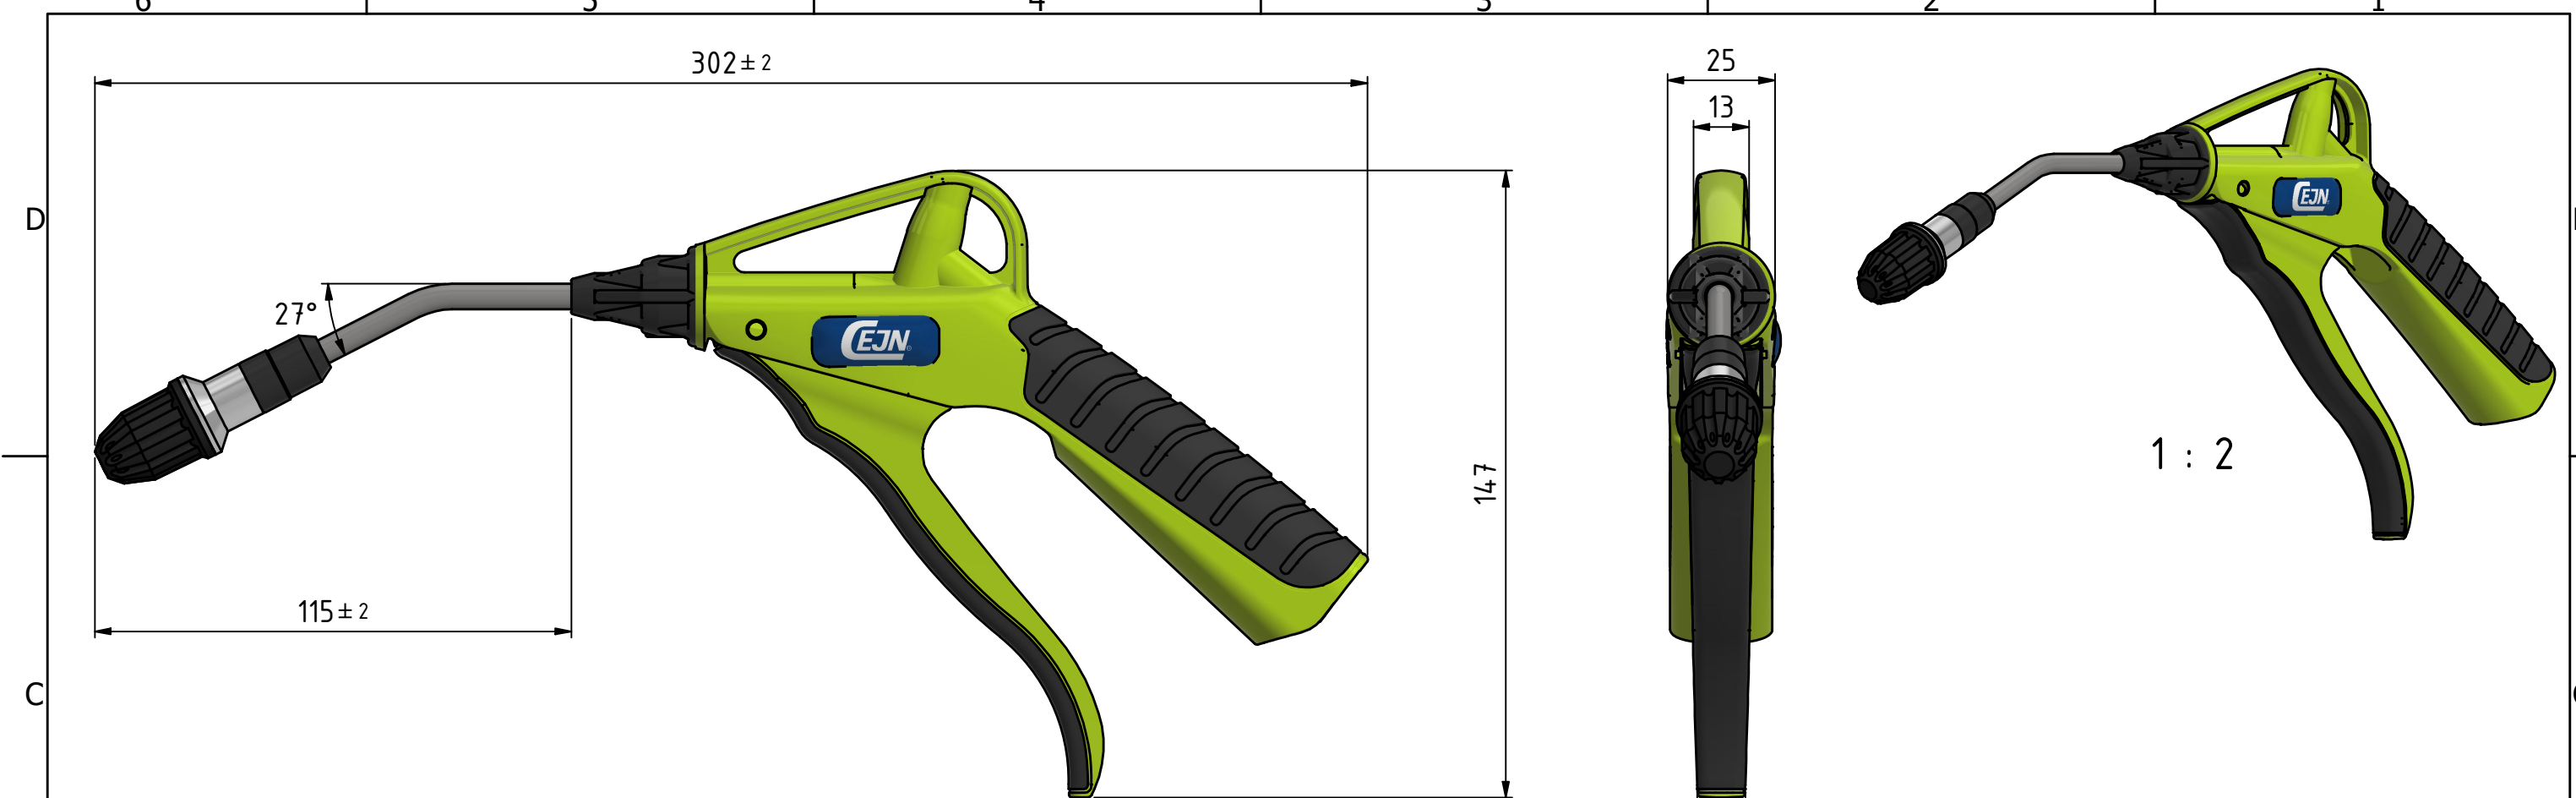

Scale: 2 : 3 | Drawn: CABANLA | Checked: JOTU | Appr.: JOOL | ECO | Date: | Issue: A | Sheet: 1 / (1)

