

PRODUCT DATA SHEET

XT100 EXTENDED X-LOCK


TOPLINE ●●●

- Lifetime
- Cutting ability for solid material
- Cutting ability for thin-walled material

Shape 41 

- Cutting disc with ceramic abrasive grain
- High cutting speed
- Little bur formation

Cutting disc with ceramic abrasive grain. For aggressive cutting performance and a long lifetime with high-volume grinding.

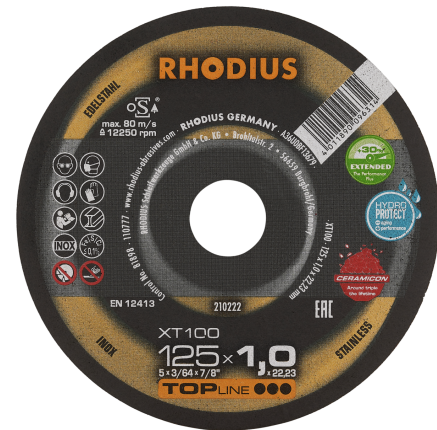

Type designation	XT100 EXTENDED X-LOCK
Article designation 1	Extra-thin cutting disc
Article designation 2	X-LOCK
Article no.	211321
GTIN	4011890124574
Content	25
Content unit	Piece
Weight	0,035 kg
Product dimensions	115 x 1,0 x 22,23
Diameter 1	115 mm
Thickness	1,0 mm
Hole	22,23 mm
Shape long version	Straight cutting disc
Shape short version	Shape 41
Working speed	80 m/s
Maximum revolutions	13300 U/min
Material suitability	Stainless steel Steel
Machine suitability	Freehand angle grinder
Technologies	CERAMICON EXTENDED HYDROPROTECT
Safety and application identification	Iron and sulphur free $\leq 0.1\%$
Industry suitability of the article	Plant construction Building fitter's shop Boiler and tank construction Vehicle construction Structural steel construction Foundry and dressing shop Pipeline construction Container construction Shipyards
Abrasive marking according to EN 12413	A36U0BF13679
Product category number	PK01
Product category text	XTS
GTIN barcode packing unit	4011890124611
Type of packaging	Carton
Packing unit	1
Package length	130 mm
Package width	130 mm
Package height	75 mm
Weight of packing unit	0,875 kg
Customs tariff number	68042218
Country of origin	DE

RHODIUS Schleifwerkzeuge GmbH & Co. KG

Brohltalstraße 2 · D-56659 Burgbrohl · service@rhodius.de · www.rhodius-abrasives.com
Tel. +49 2636 920-400 · kostenfreie Fax-Nr. (DE) +49 800 6645394

RHODIUS